

CSE24375T01 TRANSFORMER

625 KVA 3 PHASE 60 HERTZ 65°C RISE
VOLTS AMPS CONDUCTOR BIL

X1-X2-X3	480	752	CU	30
R1-R3-R5	480	376	CU	30
R2-R4-R6	480	376	CU	30

3.2 % IMPEDANCE @ 85°C


1.0 % RESISTANCE 3.0 % REACTANCE

272 GAL. MINERAL OIL **NON-PCB** CLASS OA
TANK IS DESIGNED FOR 7 PSIG

OIL LEVEL IS 7" BELOW THE LID AT 25°C

OIL LEVEL CHANGES 0.35" PER 10°C

TOTAL MASS	6214 LB.
OIL MASS	2041 LB.
UNTANKING MASS	2940 LB.
TANK AND FITTINGS MASS	1233 LB.

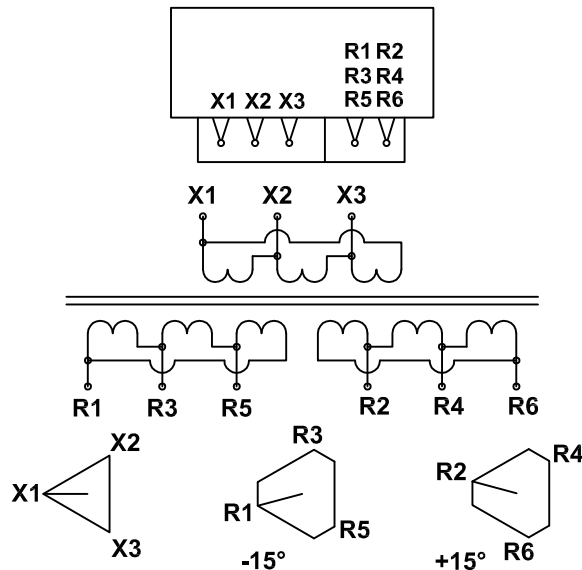

TAPS

MADE IN USA

0061-200928-651



BARCODE THE 13 DIGITS OF P.N.
ONLY IN FORMAT 128, 0.25"
HEIGHT HUMAN READABLE TEXT,
WITH DASHES, IN 0.1" HEIGHT
USE BLACK BARCODE

GENERAL TOLERANCES (UNLESS OTHERWISE SPECIFIED)
LINEAR .063 IN (1/16) WIEDAMATIC .031 IN
DIAGONAL .093 IN (3/32) PORCELAIN .03 PER IN

TAPS



MADE IN USA

					NAME: T.A.P.S. NAMEPLATE 1	c.c. 714
B	12/23/09	ADDED BARCODE	ST	ST	DESCR: 9969410045076	
A	10/10/08	Issued as record.	JS	JS	3JRS0401	61200928.651
REV.	DATE	REVISION	BY	APP.	SCALE 1.000	DWG BY JS
					CHK BY	DATE 10/06/08